

RESIDENTIAL  
& COMMERCIAL

INDUSTRIAL  
& MARINE

ART  
& CRAFT



**SHIMICOAT**  
SURFACE SOLUTIONS

# Slip Resistant Epoxy Flake Floor Complete Kit

## Kit Sizes

### 15sqm Kit Contains

Product Description	Size	Code	Quantity
Premium Tinted Epoxy	4Lt	PT	1
Vinyl Flake	5Kg	VF	1
UVthane PLUS	4.6Lt	UP	1
Xtra Grip Slip Resistant	1Kg	XG	1
EpoDil	1Lt	ED	1

### 40sqm Kit Contains

Product Description	Size	Code	Quantity
Premium Tinted Epoxy	12Lt	PT	1
Vinyl Flake	5Kg	VF	2
UVthane PLUS	7Lt	UP	1
Xtra Grip Slip Resistant	2Kg	XG	1
EpoDil	1Lt	ED	1

### 60sqm Kit Contains

Product Description	Size	Code	Quantity
Premium Tinted Epoxy	20Lt	PT	1
Vinyl Flake	5Kg	VF	3
UVthane PLUS	4.6Lt	UP	2
Xtra Grip Slip Resistant	2Kg	XG	1
EpoDil	1Lt	ED	2

### 90sqm Kit Contains

Product Description	Size	Code	Quantity
Premium Tinted Epoxy	20Lt	PT	2
Vinyl Flake	5Kg	VF	4
UVthane PLUS	15Lt	UP	1
Xtra Grip Slip Resistant	4Kg	XG	1
EpoDil	4Lt	ED	1

#### Flake Consumption:

SHIMICOAT recommends full broadcast Flake "to point of rejection", which is calculated to be 0.5Kg/sqm. Full broadcast results in some usable excess recovery.



**MATERIALS**



**CHEMICALS**



**RESINS**




**EQUIPMENT**

Ph: (08) 9364 7446 | [info@shimi.com.au](mailto:info@shimi.com.au) | ABN: 28 622 871 283 | [www.shimi.com.au](http://www.shimi.com.au)

## Description

SHIMICOAT Epoxy Slip Resistant Flake Floor is a complete kit containing multi-Layer epoxy coatings of:

1. Premium Tinted Epoxy Prim Coat (Optional),
2. Premium Tinted Epoxy Base Coat,
3. Vinyl Flake Layer
4. Slip Resistant Grits
5. UVthane Top Coat

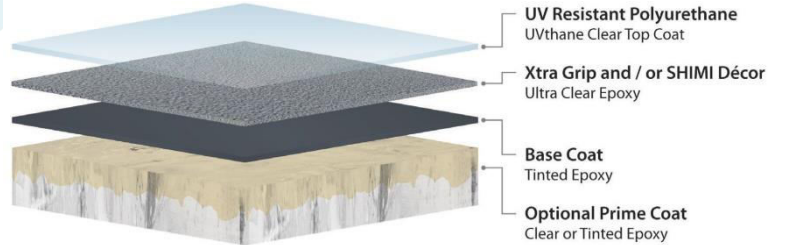

SHIMICOAT Slip Resistant Epoxy Flake Floor is a decorative, durable, seamless, hygienic and easy to maintain multi-layer coating solution. Engineered for Australian climate and ideally suitable for interior and exterior applications.

## Colour Chart

### Prime Coat & Base Coat Colours

Standard Colours:

- White N14
- Black N61
- Neutral Grey N23
- Dark Grey N64
- Cream Y34
- Terracotta R52
- Bright Blue B23
- Dark Brown X65

SHIMICOAT offers all Australian Standard AS2700 Colours, consisting of 206 colours.

Please contact SHIMICOAT office for your custom design tint. Extra charges may apply.

## Flake Colours & Blended Designs

SHIMICOAT offers flakes in three design pattern and styles:

### Blended Flakes:

- Domino
- Orbit
- Outback
- Tidal Wave
- Nightfall
- Gravel
- Creekbed
- Hog

### Hybrid Flakes:

- Jawbreaker
- Juneau

### Marble Flakes:

- Basalt
- Schist
- Pumice

### Glitter Accented Flakes: 3% Holographic Glitters

- Domino Glitter
- Orbit Glitter
- Outback Glitter
- Basalt Glitter
- Tidal Wave Glitter
- Nightfall Glitter
- Gravel Glitter
- Schist Glitter
- Creekbed Glitter
- Hog Glitter
- Pumice Glitter

Basecoat colour may have an effect on the shade of flake floor finished surface. Darker Basecoat may make the surface darker flake finish and lighter may assist the appearance of flake floor finish surface to be lighter.

If you like any colour that we may not show on our website or colour chart, simply provide us with something to match and we will produce any blend from any combination of coloured Flakes to your desire.

## Grit Sizes – Xtra Grip SlipRes Materials

Standard Grit included in this kit is Medium R11. Extra charge may apply for other grits. Please contact SHIMICOAT for your specific requirement prior to dispatch.

Grit Size	Oil-Wet Inclining Platform Test	Wet Pendulum Test
Super Fine	R9	P2
Fine	R10	P3
Medium	R11	P4
Coarse	R12	P5
Super Coarse	R13	P6

## Coverage

Each kit covers the specified concrete surface.

Please consider extra kit of Premium Tinted Epoxy for substandard and damaged concrete surfaces.

Partial Broadcast: One box of Flake (5Kg) per standard double garage (36sqm)

Full Broadcast: One box of Flake (5Kg) per 10sqm (0.5Kg/sqm)

Typical broadcast is any quantity up to 0.5Kg/sqm (Dosage may increase or decrease to your desired density).

## Applications

Roller, Brush or Squeegee.

## Dry Time at 25°C

Parameter	Premium Tinted Epoxy (Basecoat)	UVthane or UVthane PLUS(Topcoat)
<b>Pot Life:</b>	45 minutes at 25°C	45 minutes at 25°C
<b>Tack Free:</b>	2-3 hours	2-3 hours
<b>Thin Film Set:</b>	8 Hours (Minimum) Depending on temperature and humidity	8 Hours (Minimum) Depending on temperature and humidity
<b>Dry Cured:</b>	12-24 hours – Foot Traffic (depending on temperature and humidity)	12-24 hours – Foot Traffic (depending on temperature and humidity)
<b>Fully Cured:</b>	7 days (Vehicle Traffic)	7 days (Vehicle Traffic)
<b>Re-Coat:</b>	Overnight (16Hours)	Overnight (16Hours)

Multilayer Flooring systems can be installed consecutively. Each coat can be applied soon after thin film set/dry cured and being accessible.