

PRIOR TO COAT

MODERN . HYGIENIC

FUNCTIONAL . ECONOMICAL



SHIMICOAT
SURFACE SOLUTIONS





PRIOR TO COAT

-  Cove Floor to Wall Joints
-  Screed Uneven Surfaces
-  Patch and Repair Damaged Concrete Surfaces

Epoxy Mortar

SHIMICOAT provides a Fast Cure clear epoxy (2-4 Hours Curing Time) in conjunction with Silica Sand or Super Ceramic for commercial coving, screeding and various surface preparations Prior to Coating. SHIMICOAT Epoxy Mortar has high MPa value of over 50mpa, which is stronger than concrete. It never chips, cracks or splits when exposed to high impact or extreme pressure.

Manufactured by SHIMICOAT, the products are odourless, self-levelling, easy to apply and engineered to be ideally suited to Australian conditions.




Where to Apply:

- Bunds and Spill Containments
- Marine Surfaces and Boat Ramps
- Cracks and Holes in Concrete Surfaces
- Coving of Floor to Wall Joints
- Falls to Wastes
- Prior to Coat Surface Preparation

Features:

- Fast Cure and Easy to Apply
- Produces a Super Hard Surface (>50MPa)
- Resistant to Chemicals
- Strong Bonding to most Substrates
- Strong Inter-coat Adhesion
- Economical

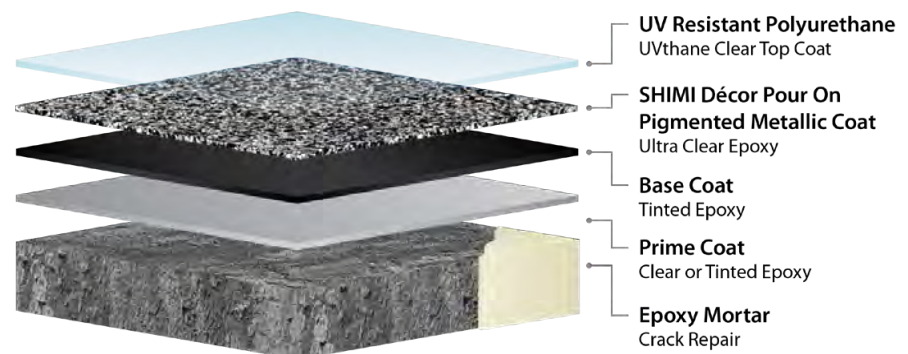

For further details please contact SHIMICOAT Sales and Technical Department or refer to product bulletin or company website.

www.shimi.com.au

Ph: (08) 9364 7446 | info@shimi.com.au | ABN: 28 622 871 283