

RESIDENTIAL
& COMMERCIAL

INDUSTRIAL
& MARINE

ART
& CRAFT

SHIMICOAT
SURFACE SOLUTIONS



Benchtop Epoxy Metallic Complete Kit

Kit Sizes

5sqm Kit Contains

Product Description	Size	Code	Quantity
Premium Tinted Epoxy	2Lt	PT	1
Ultra-Clear Epoxy	3Lt	UC	1
Dominant Pearlescent Powder Pigment	60gr	PP	1
Contrast/Feature Pearlescent Powder Pigment	30gr	PP	1
UVthane PLUS	1.15Lt	UP	1

10sqm Kit Contains

Product Description	Size	Code	Quantity
Premium Tinted Epoxy	4Lt	PT	1
Ultra-Clear Epoxy	6Lt	UC	1
Dominant Pearlescent Powder Pigment	120gr	PP	1
Contrast/Feature Pearlescent Powder Pigment	60gr	PP	1
UVthane PLUS	2.3Lt	UP	1


Description

Benchtop Epoxy Metallic is a complete kit containing Epoxy and Coating Materials for multi-layer coating with decorative finish.

The kit contains:

1. Epoxy Prime/Base Coat in your choice of Colour
2. Ultra Clear Metallic Epoxy Coating
3. Pearlescent Pigments in two colours
4. UVthane PLUS Clear Topcoat (Scratch / UV Resistant)

Please refer to SHIMICOAT colour brochures for your décor matching selection.

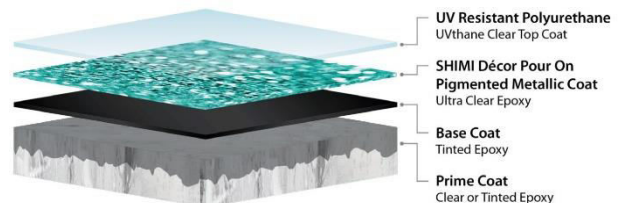

Colour Chart – Standard Primecoat/Basecoat Colours

Prime Coat and Base Coat “Standard Colours”:

- White N14
- Dark Grey N64
- Bright Blue B23
- Black N61
- Cream Y34
- Dark Brown X65
- Neutral Grey N23
- Terracotta R52

SHIMICOAT offers all Australian Standard AS2700 Colours, consisting of 206 colours.

Please contact SHIMICOAT office for your custom design tint. Extra charges may apply.

 **MATERIALS**  **CHEMICALS**  **RESINS**  **EQUIPMENT**

Ph: (08) 9364 7446 | info@shimi.com.au | ABN: 28 622 871 283 | www.shimi.com.au

Colour Chart – Pearlescent Metallic Dominant/Feature Colours

- Copper Cup
- Dragon Gold
- Flame Red
- Forest Green
- Grass Green
- Lime Green
- Pink Perfect
- Royal Blue
- Coffee Club
- Silver Frost
- Sunshine Yellow
- Vibrant Purple
- Wild Orange
- Onyx Black
- Pearl White
- Milky Marble
- Metallic Yellow
- Teal
- Turquoise
- Cobalt Aqua

Applications

Roller, Brush or Squeegee.

- Primer:** One Coat as Primer in your choice of colour
Basecoat: One Coat as Basecoat in same colour as Primer for extra coverage
Dominant Metallic: 10-20g/L of Dominant Metallic Pearlescent Powder
Feature Metallic: Small quantity of Feature Metallic Pearlescent Powder
Pour-On Metallic Epoxy at a rate of 0.5-1.0L/sqm

Dry Time at 25°C

Each Coat (Primer, Basecoat and Clear Pour-On Topcoat):

Pot Life:	45 minutes at 25°C
Tack Free:	2-3 hours
Thin Film Set:	8 Hours (Min, depending on temperature and humidity)
Dry Cured:	12-24 hours (depending on temperature and humidity)
Fully Cured:	7 days (Heavy Objects Exposure)
Re-Coat:	Over night